

BUFFALO BACKFLOW INC.


SPRINKLER GAUGE

- UL listed / FM Approved pressure gauges designed for use in the fire protection/sprinkler market.
- Suitable for air, water, oil, gas or any other media not corrosive to brass.
- Other Ranges, connection locations, mounting styles and accessories available.
- Ready for immediate shipment upon request.

DIAL SIZE: 3 1/2" **CONNECTION SIZE:**

1/4"NPT GENERAL SPECIFICATIONS:

Black Plastic Case
 Screw-on Molded Plastic Lens & Bezel
 Brass Socket And Movement Phosphor
 Bronze Bourdon Tube Dry Non-Fillable
 3-2-3 % Accuracy
 Ambient Temperature: -50 to 160°F

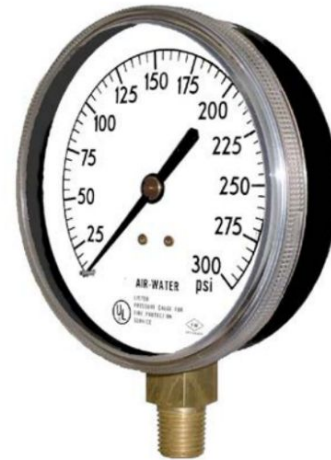

DIAL SCALE:

SINGLE SCALE: PSI ONLY STANDARD

DUAL SCALE: PSI & BAR (x100=kPa) AVAILABLE

OTHER: BY SPECIAL REQUEST

Part Number	RANGE	Case	Major Inc.	Minor Inc.
SPRINKLER-WATER	0/300	Plastic	25 PSI	5 PSI
SPRINKLER-AIR	0/80-250	Plastic	Retard – Non-linear Scale	

Stocked Accessories:


Pigtail Siphons

Gauge Cock

Snubbers

Test Plugs

Diaphragm Seals

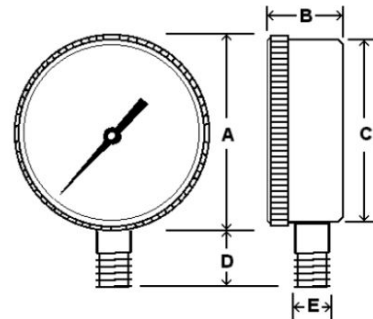

		A	B	C	D	E
3 1/2" Dial	In.	3.875"	1.15"	3.71"	1.08"	1/4
	MM	98	29	94	27.5	MNPT